



UNIVERSAL AIR CONDITIONER SUPPORT BRACKETS



ACBR85

- Heavy-duty—supports up to 85 lbs.
- Commonly used with 5,000 to 8,000 BTU units
- Fits wall thickness from 2 to 6 inches
- Includes built-in level


ACBR165

- Heavy-duty—supports up to 165 lbs.
- Commonly used with 7,000 to 18,000 BTU units
- Fits wall thickness from 2 to 8 inches
- Includes built-in level



ACBR200

- Commercial duty—supports up to 200 lbs.
- Commonly used with 10,000 to 25,000 BTU units
- Fits wall thickness from 4 to 11 inches
- No drilling required

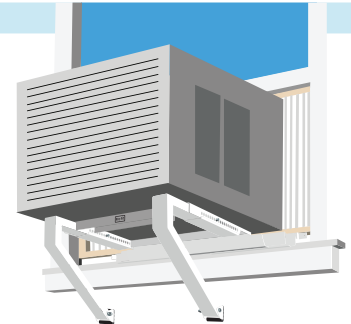

	ACBR85	ACBR165	ACBR200
ITEM DIMENSIONS (WxHxD) (in.)	13.0 x 4.5 x 2.25	17.0 x 4.5 x 2.25	26.0 x 16.5 x 7.0
ITEM WEIGHT (lbs.)	2.2	2.7	13.0
PACKAGE DIMENSIONS (WxHxD) (in.)	14.5 x 3.75 x 1.5	18 x 3.75 x 1.5	25.0 x 17.0 x 5.0
PACKAGE WEIGHT (lbs.)	2.4	2.9	13.3
MASTER CASE PACK QUANTITIES	30 pcs.	30 pcs.	4 pcs.
PALLET QUANTITY (packages)	480	480	32

FEATURES

- For single or double hung windows only, 24 to 38 inches wide
- Reduces pressure and weight on window sill
- Easy to install

EASY INDOOR INSTALLATION

- Minimizes risk of damage to window, exterior wall, or siding
- All necessary hardware included
- Durable and weather-resistant